



FortiAnalyzer™

Centralized logging, analytics and reporting



Comprehensive Visualization of Your Network

FortiAnalyzer platforms integrate network logging, analytics, and reporting into a single system, delivering increased knowledge of security events throughout your network. The FortiAnalyzer family minimizes the effort required to monitor and maintain acceptable use policies, as well as identify attack patterns to help you fine tune your policies. Organizations of any size will benefit from centralized security event logging, forensic research, reporting, content archiving, data mining and malicious file quarantining.

You can deploy FortiAnalyzer physical or virtual appliances to collect, correlate, and analyze geographically and chronologically diverse security data. Aggregate alerts and log information from Fortinet appliances and third-party devices in a single location, providing a simplified, consolidated view of your security posture. In addition, FortiAnalyzer platforms provide detailed data capture for forensic purposes to comply with policies regarding privacy and disclosure of information security breaches.

Key Features & Benefits

Graphical Summary Reports	Provides network-wide reporting of events, activities and trends occurring on FortiGate® and third-party devices.
Network Event Correlation	Allows IT administrators to quickly identify and react to network security threats across the network.
Scalable Performance and Capacity	FortiAnalyzer family models support thousands of FortiGate and FortiClient™ agents, and can dynamically scale storage based on retention/compliance requirements.
Centralized Logging of Multiple Record Types	Including traffic activity, system events, viruses, attacks, web filtering events, and email filtering.
Seamless Integration with the Fortinet Product Portfolio	Tight integration allows FortiAnalyzer resources to be managed from FortiGate or FortiManager™ user interfaces.
Choice of Standalone, Collector or Analyzer mode	Can be deployed as an individual unit or optimized for a specific operation (such as Store & Forward or Analytics).
Virtual and Physical Appliance Form Factors	Available for VMware ESX/ESXi, Microsoft Hyper-V, Amazon Web Services (AWS) and in multiple hardware appliance form factors. Virtual appliances support deployment in centralized storage as enabled by the virtualization or cloud environment (SAN, NAS, etc...).

Fortinet's Versatile Management Solution

Networks are constantly evolving due to threats, organizational growth or new regulatory/business requirements. Traditional analysis products focus on recording and identifying company-wide threats through logging, analysis and reporting over time.

FortiAnalyzer offers enterprise class features to identify these threats, but also provides flexibility to evolve along with your ever-changing network. FortiAnalyzer can generate highly customized reports for your business requirements while aggregating logs in a hierarchical, tiered logging topology.

Key tenets of Fortinet's management versatility:

- Diversity of form factors
- Architectural flexibility
- Highly customizable
- Simple licensing



FortiCare
Worldwide 24x7 Support
support.fortinet.com



FortiGuard
Threat Research & Response
www.fortiguard.com



Fortinet
Developer Network
Worldwide Developer Community


HIGHLIGHTS

Reporting and Visualization Tools

- **FortiView Summary Views**
Generation ad-hoc graphical, filterable views of top users, applications, destinations, websites, threats, VPN usage and more.
- **Built-in Report Templates**
Utilize or modify the PDF templates to display colorful, comprehensive, graphical network security and usage reports.
- **UTM & Traffic Summary Reports**
Regularly analyze the security profile and traffic/bandwidth patterns with a new consolidated UTM/Traffic report.
- **Event Management**
Raise and monitor important events to present the IT administrator with unprecedented insight into potentially anomalous behavior.
- **Import/Export Templates**
After building a report, export and modify the configuration on another FortiAnalyzer or different ADOM.

JSON and XML (Web Services) APIs

- APIs are available on all FortiAnalyzer hardware models and virtual machines
- JSON API — Allows MSSPs/large enterprises to manipulate FortiAnalyzer reports, charts/datasets and objects
- XML API — Enables IT administrators to quickly provision/configure FortiAnalyzer and generate reports
- Access tools, sample code, documentation and interact with the Fortinet developer community by subscribing to the Fortinet Developer Network (FNDN)

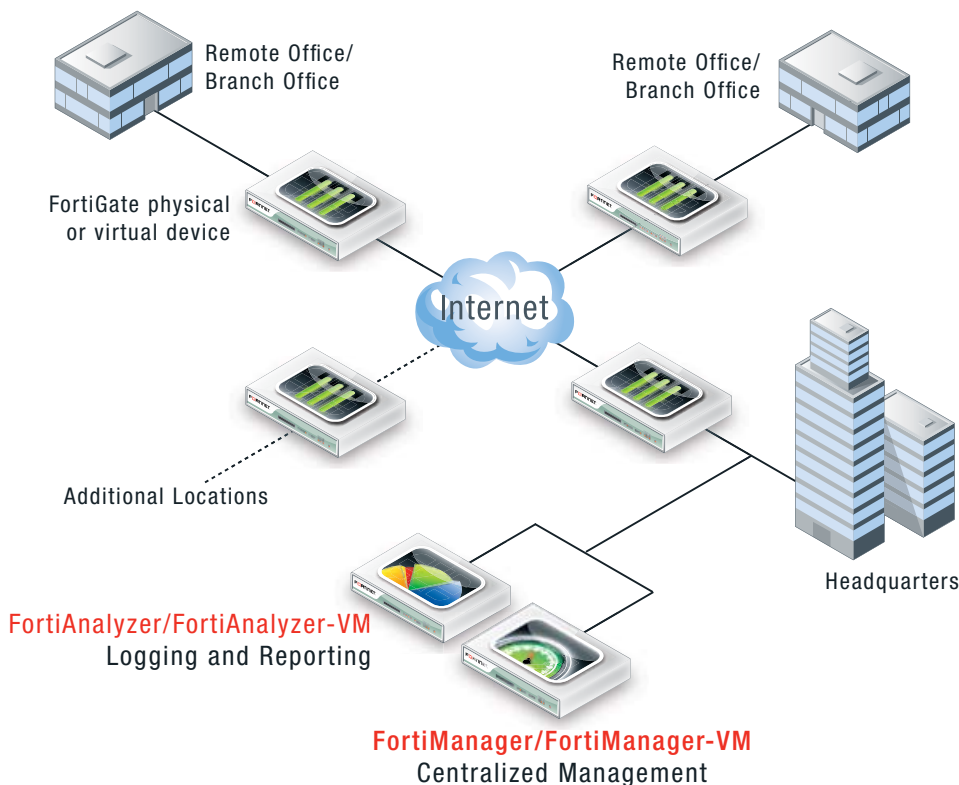

Log Viewer

- View logs in real-time or historical
- Select from traffic, event and full security logs
- Browse by device, ADOM or in aggregate
- Log filtering and search capabilities
- Granular inspection with the log details pane
- Intuitive icons for countries, applications, etc.

Event Management

- Comprehensive alert builder
- Trigger off of severity levels, specific events, actions and destinations
- Set varying thresholds by number of events within a certain timeframe
- View or search through historical alerts
- Notify via email/SNMP or raise a syslog event

Better with FortiManager

- Enterprise-class device management
- Familiar GUI for full network control
- Available as integrated solution with FortiAnalyzer

DLP Archiving

- Investigate DLP content archives
- Supported archive types include: email, HTTP, FTP, IM
- View archive text or download files

FortiAnalyzer Supported Devices

- FortiGate Multi-Threat Security Systems
- FortiMail Messaging Security Systems
- FortiClient Endpoint Security Suite
- FortiWeb Web Application Security
- FortiManager Centralized Management
- FortiSandbox Threat Protection
- FortiCache Web Caching
- Any Syslog-Compatible Device

SPECIFICATIONS

	FORTIANALYZER 200D	FORTIANALYZER 300D	FORTIANALYZER 1000D	FORTIANALYZER 2000B
Capacity and Performance				
GB/Day of Logs	5	15	25	75
Sessions/Day	18 M	55 M	85 M	260 M
Peak Log Rate (Standalone Mode)	350	625	1,000	5,000
Sustained Log Rate (Standalone Mode)	120	200	350	1,500
Average Retention at 5 GB Logs/Day	3 months	1 year	2 years	3 years
Devices/VDOMs/ADOMs (Maximum)	150	175	2,000	2,000
Hardware Specifications				
Form Factor	1 RU Rackmount	1 RU Rackmount	2 RU Rackmount	2 RU Rackmount
Total Interfaces	4x GE	4x GE	6x GE, 2x GE SFP	6x GE
Number of Hard Drives	1	2	4	2 (6 Drives Maximum)
Removable Hard Drives	No	No	Yes	Yes
Storage Capacity	1x 1 TB	2x 2 TB	4x 2 TB	2x 2 TB (12 TB Maximum)
RAID Storage Management	No	Yes (mirrored)	Yes (0, 1, 5, 6, 10)	Yes (0, 1, 5, 10, 50)
Redundant Hot Swap Power Supplies	No	No	Yes	Yes
Dimensions				
Height x Width x Length (inches)	1.8 x 17.1 x 13.9	1.7 x 17.1 x 14.3	3.5 x 17.2 x 14.5	3.4 x 17.4 x 26.8
Height x Width x Length (cm)	4.5 x 43.3 x 35.2	4.4 x 43.5 x 36.4	9 x 43.8 x 36.8	8.6 x 44.3 x 68.1
Weight	13.4 lbs (6.1 kg)	15.9 lbs (7.2 kg)	30.6 lbs (13.9 kg)	63 lbs (28.6 kg)
Environment				
AC Power Supply	100–240V AC, 50–60 Hz, 6 Amp Max.	100–240V AC, 50–60 Hz, 4 Amp Max.	100–240V AC, 50–60 Hz, 5 Amp Max.	100–240V AC, 50–60 Hz, 9 Amp Max.
Power Consumption (Average)	60 W	162 W	133 W	200 W
Heat Dissipation	205 BTU/h	666 BTU/h	546 BTU/h	519 BTU/h
Operating Temperature	32–104°F (0–40°C)	50–95°F (10–35°C)	32–104°F (0–40°C)	50–95°F (10–35°C)
Storage Temperature	-13–158°F (-35–70°C)	-40–158°F (-40–70°C)	-13–158°F (-25–70°C)	-40–149°F (-40–65°C)
Humidity	5–95% non-condensing	8–90% non-condensing	5–95% non-condensing	5–95% non-condensing
Operating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)
Compliance				
Safety Certifications	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST
	FORTIANALYZER 3000E	FORTIANALYZER 3500E	FORTIANALYZER 3900E	
Capacity and Performance				
GB/Day of Logs	800	Unrestricted*	Unrestricted*	
Sessions/Day	850 M	Unrestricted*	Unrestricted*	
Peak Log Rate (Standalone Mode)	50,000	60,000	75,000	
Sustained Log Rate (Standalone Mode)	15,000	20,000	25,000	
Average Retention at 5 GB Logs/Day	4 years	6 years	3.5 years	
Devices/VDOMs/ADOMs (Maximum)	4,000	4,000	4,000	
Hardware Specifications				
Form Factor	2 RU Rackmount	4 RU Rackmount	2 RU Rackmount	
Total Interfaces	4x GE, 2x GE SFP	2x GE, 2x GE SFP	2x GE, 2x GE SFP+	
Number of Hard Drives	8	12 (24 Drives Max)	15	
Removable Hard Drives	Yes	Yes	Yes	
Storage Capacity	8x 2 TB (16 TB Maximum)	12x 2 TB (48 TB Maximum)	15x 960 GB (14.4 TB Maximum)	
RAID Storage Management	Yes (0, 1, 5, 6, 10, 50, 60)	Yes (0, 1, 5, 6, 10, 50, 60)	Yes (0, 1, 5, 6, 10, 50, 60)	
Redundant Hot Swap Power Supplies	Yes	Yes	Yes	
Dimensions				
Height x Width x Length (inches)	3.4 x 19 x 29.7	6.9 x 19.1 x 27.2	3.5 x 17.2 x 26.9	
Height x Width x Length (cm)	8.7 x 48.2 x 75.5	17.5 x 48.5 x 69.0	89 x 437 x 684	
Weight	71.5 lbs (32.5 kg)	77 lbs (34.9 kg)	52 lbs (23.6 kg)	
Environment				
AC Power Supply	100–240V AC, 50–60 Hz, 10 Amp Maximum	100–240V AC, 50–60 Hz, 11.5 Amp Maximum	100–240V AC, 50–60 Hz, 11.5 Amp Maximum	
Power Consumption (Average)	375.8 W	465 W for 12 HDD	470 W for 15 HDD	
Heat Dissipation	1947 BTU/h	1904 BTU/h	1637 BTU/h	
Operating Temperature	50–95°F (10–35°C)	32–104°F (0–40°C)	50–95°F (10–35°C)	
Storage Temperature	-40–149°F (-40–65°C)	-13–158°F (-25–70°C)	-40–60°C (-40–140°F)	
Humidity	20–90% non-condensing	10–90% non-condensing	5–95% (non-condensing)	
Operating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	
Compliance				
Safety Certifications	FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	

* Only restricted to the hardware platform performance (e.g. there are no software licensing limitations)

SPECIFICATIONS

	FAZ-VM-BASE	FAZ-VM-GB1	FAZ-VM-GB5	FAZ-VM-GB25	FAZ-VM-GB100
Capacity and Performance					
GB/Day of Logs	1 incl.**	+1	+5	+25	+100
Sessions/Day	3.5 M	3.5 M	18 M	85 M	360 M
Device Quota ***	200 GB	200 GB	1 TB	8 TB	16 TB
Devices/ADOMs/VDOMs Supported (Maximum)	10,000	10,000	10,000	10,000	10,000
Hypervisor Support	VMware ESX/ESXi 4.0/4.1/5.0/5.1/5.5, Microsoft Hyper-V 2008 R2 / 2012, AWS (Amazon Web Services) AMI				
Network Interface Support (Minimum / Maximum)	1 / 4				
vCPUs (Minimum / Maximum)	1 / Unlimited				
Memory Support (Minimum / Maximum)	1 GB / Unlimited				

** Unlimited GB/Day when deployed in collector mode

*** Device quota is not stackable, this represents the maximum quota available with purchased license.



GLOBAL HEADQUARTERS

Fortinet Inc.
899 Kifer Road
Sunnyvale, CA 94086
United States
Tel: +1.408.235.7700
Fax: +1.408.235.7737

EMEA SALES OFFICE

120 rue Albert Caquot
06560, Sophia Antipolis,
France
Tel: +33.4.8987.0510
Fax: +33.4.8987.0501

APAC SALES OFFICE

300 Beach Road #20-01
The Concourse
Singapore 199555
Tel: +65.6513.3730
Fax: +65.6223.6784

LATIN AMERICA SALES OFFICE

Prol. Paseo de la Reforma 115 Int. 702
Col. Lomas de Santa Fe,
C.P. 01219
Del. Alvaro Obregón
México D.F.
Tel: 011-52-(55) 5524-8480

Copyright© 2014 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.